

GNSS Active Patch Antenna


DATASHEET

ISIS-GAPA-DSH-0001, version 2.2

CubeSat standard active GNSS patch antenna

Applications

The ISIS GNSS patch antenna is a compact, low-mass active antenna, designed for GPS-L1 / GALILEO-E1. This active antenna is suitable for providing CubeSat platforms with precise positioning and is compatible with the ISIS structures.

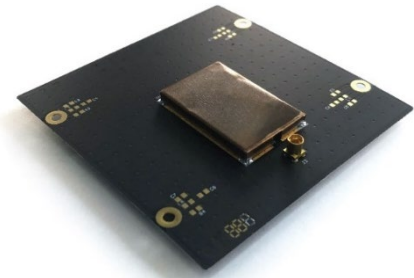

General description

The ISIS GNSS antenna is part of a new generation of antennas designed for CubeSats and nanosatellites. It is an off-the-shelf compact active antenna used for receiving GPS L1 and GALILEO E1 signals.

Compatibility

- Compatible with ISIS CubeSat structures.

Flight heritage and quality assurance

- Qualification Thermal Testing, -30 to +70 °C.
- Qualification tested for quasi-static acceleration up to 15g in three axes. Flight units thermally acceptance tested for workmanship.
- IPC-A-610 Class 3 PCB and assembly.

Product Features

- Frequency range: 1572 - 1578 MHz (GPS-L1 / GALILEO-E1)
- Lightweight solution <20g
- Supplied with CubeSat compatible mounting plate
- Antenna peak gain of 5.5 dBi
- Signal gain up to 34.5 dB
- SAW filters used in the active frontend
- Single straight MMCX connector for both power and RF lines
- Right Hand Circular Polarization
- Power supply between 3 - 5VDC
- Powered consumption < 10 mA @ 5VDC

Ordering information

Please contact sales@isispace.nl for ordering information

Specification

Table 1 GAPA Specification

Parameter	Typical Value	Units
Environmental Characteristics		
Operational temperature	-30 to +70	°C
RF Characteristics		
Frequency Range:	1572 - 1578(GPS L1 / GALILEO E1)	MHz
Signal gain (active circuitry)	34.5	dB
Antenna peak gain	5.2 (1575 MHz)	dBi
Axial ratio	< 3	dB
Return Loss	> 15	dB
Bandwidth	6	MHz
Polarization	RHCP	-
Physical Characteristics		
Mass	18	g
Dimensions (H x W x T)	70 x 70 x 9.7	mm
Connector type	MMCX (for both RF and power line-female)	-
Antenna material	Ceramic	-
Electrical Characteristics		
Supply voltage	3 - 5	VDC
Current consumption	< 10 mA	mA

RF Description

Radiation Pattern

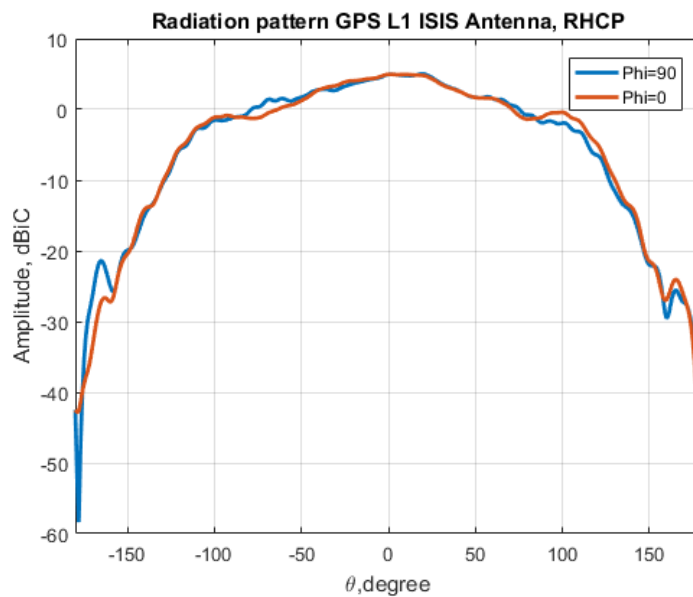


Figure 1 Typical co-polar radiation pattern at 1575 MHz

Mechanical Description

Mechanical Outline

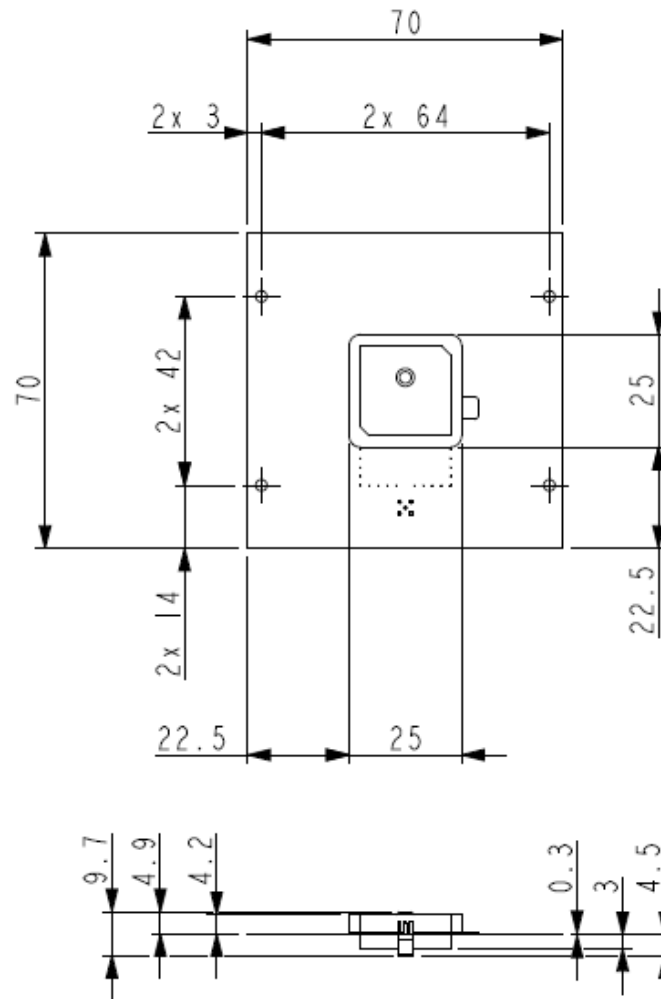


Figure 1 Mechanical outline

Detailed interface information and CAD models of the entire GAPA may be delivered on request.

Disclaimer

The contents of this document are subject to the relevant provisions in the contract concluded between the parties. ISISPACE Group ("ISIS") shall not be liable, in full or in part, for any damage arising out from the application or use of any product or circuit described herein, in case such application or use are carried out in a manner, not in line with the instructions and warranties provided in the User Manual, Safety Manual, product information sheets or any other document provided by ISIS upon the delivery of the product ("Documents"). Further, ISIS shall not be liable for any damage caused by any use which exceeds the function(s) of the product or does not conform to such function(s) as described in the Documents. ISIS shall not be liable for any damage arising from a use which is not carried out in a manner conforming to acceptable practices in the aerospace industry.

ISIS warrants that the product is supplied after relevant tests had shown the product is in good order and functioning, as far as these tests may indicate and predict product functionality.